

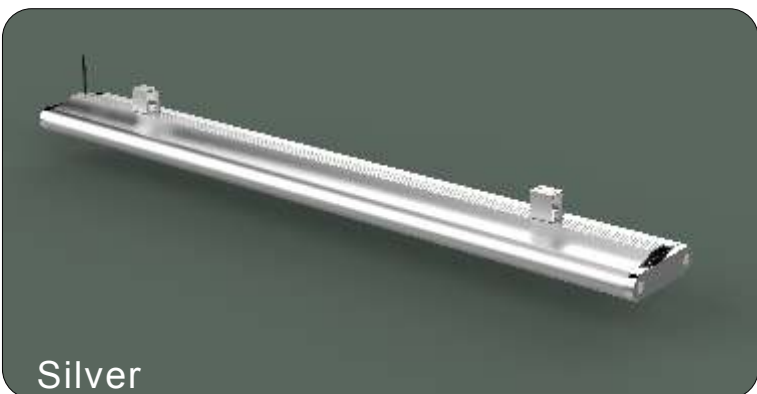


# Aglaia-Serie "LED-Komplettleuchten"

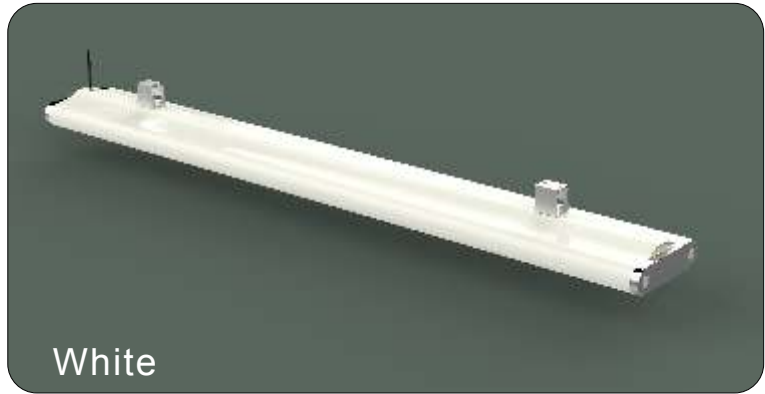

engineered +  
in switzerland

## Erhältliche Farben:

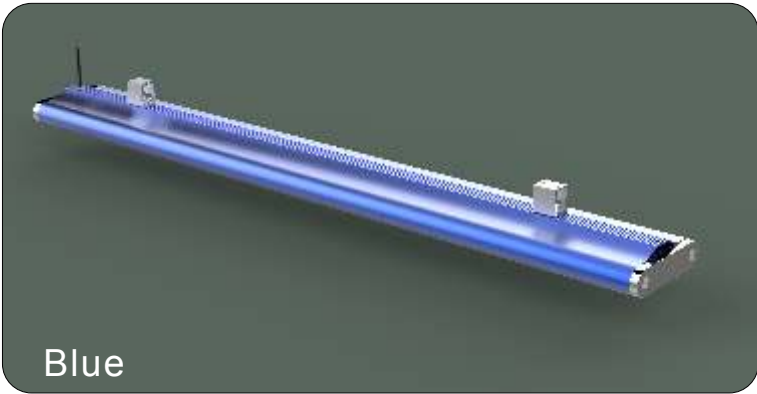

## Features :

RISU Aglaia light, presents a high quality design with patent and nice appearance, simplicity and smooth lines. The use of 6063 extrusion aluminum and high transmittance PMMA offer a reliable thermal performance and impressive light uniformity, also the luminous efficacy up to 85LM/W.


Aglaia gives different lengths for option like 600mm, 900mm, 1200mm, 1500mm , support for ceiling and pendant mounting solutions, allows flexible combinations which is linkable from end to end with accessories.

Aglaia, 50000 hours lifetime, 60% energy saving compare to conventional lighting products, high cost-effective. Can be widely use for indoor commercial applications, good for office, shopping malls and so on.

# Application



## Technical Parameters

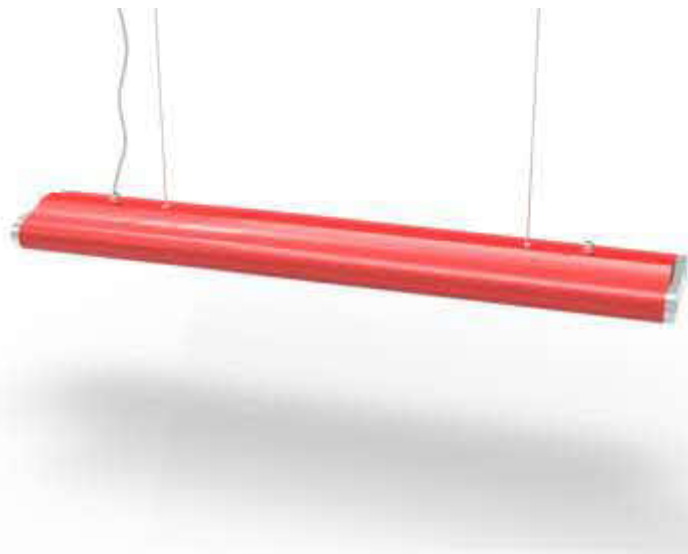

Light Fixture Size	614*160*53mm
Input Voltage	100-240VAC
Input Power	20W
Power Factor	: 0.9
Beam Angle	120°
Luminous Flux	1600LM/1640LM/1700LM
Color Rendering	WW:>80 NW:> 75 CW:>72
Life Time	50000H
CCT	3000K/4200K/6000K
LEDs	96pcs
Protection Level	IP 20
Storage Temperature	-40 to + 80 Grad
Working Temperature	-20 to + 80 Grad
Inner package size	614*204*150mm
Outer package size	625*425*165mm
Certifications	CE/RoHs
Net Weight	1.7kg
Installation	Pendant, ceiling mounting

Model number: RISU0620



### Remark:

1. The related parameters above are based on based on Lumenmax  
3022 leds.
2. Indoor use only.



## Technical Parameters



Light Fixture Size	894*160*53mm
Input Voltage	100-240VAC
Input Power	30W
Power Factor	: 0.9
Beam Angle	120°
Luminous Flux	2400LM/2460LM/2550LM
Color Rendering	WW:>80 NW:> 75 CW:>72
Life Time	50000H
CCT	3000K/4200K/6000K
LEDs	144pcs
Protection Level	IP 20
Storage Temperature	-40 to + 80 Grad
Working Temperature	-20 to + 80 Grad
Inner package size	910*204*150mm
Outer package size	920*425*165mm
Certifications	CE/RoHs
Net Weight	2.4kg
Installation	Pendant, ceiling mounting

Model number: RISU0930



### Remark:

1. The related parameters above are based on based on Lumenmax

3022 leds.

2. Indoor use only.



## Technical Parameters



Light Fixture Size	1170*160*53mm
Input Voltage	100-240VAC
Input Power	40W
Power Factor	: 0.9
Beam Angle	120°
Luminous Flux	3200LM/3280LM/3400LM
Color Rendering	WW:>80 NW:> 75 CW:>72
Life Time	50000H
CCT	3000K/4200K/6000K
LEDs	192pcs
Protection Level	IP 20
Storage Temperature	-40 to + 80 Grad
Working Temperature	-20 to + 80 Grad
Inner package size	1205*204*150mm
Outer package size	1215*425*165mm
Certifications	CE/RoHs
Net Weight	3.6kg
Installation	Pendant, ceiling mounting

Model number: RISU1240



### Remark:

1. The related parameters above are based on based on Lumenmax 3022 leds.
2. Indoor use only.



## Technical Parameters



Light Fixture Size	1446*160*53mm
Input Voltage	100-240VAC
Input Power	50W
Power Factor	: 0.9
Beam Angle	120°
Luminous Flux	4000LM/4100LM/4250LM
Color Rendering	WW:>80 NW:> 75 CW:>72
Life Time	50000H
CCT	3000K/4200K/6000K
LEDs	240pcs
Protection Level	IP 20
Storage Temperature	-40 to + 80 Grad
Working Temperature	-20 to + 80 Grad
Inner package size	1505*204*150mm
Outer package size	1515*425*165mm
Certifications	CE/RoHs
Net Weight	4.6kg
Installation	Pendant, ceiling mounting

Model number: RISU1550



### Remark:

- The related parameters above are based on based on Lumenmax  
3022 leds.
- Indoor use only.

